

Limit value switches Low-action and snap-action contacts single, unit height	DN 160
---	-----------------------------

Type code

Type S-
Low-action contact
without magnet holder

Type Kombi S-
Low-action contact
with magnet holder

Type Kombi M-
Snap-action contact
with screwed-in magnets

Available switching functions	1
pointer moving clockwise	2
Make-contact	1
Break-contact	2

Unit height
All single low-action and snap-action contacts are available in standard or unit height.


The standard height is the lowest permissible height for the voltage range indicated.

The unit height is the height of double contacts, i.e. single and double contacts are equally high, a fact which allows the use of the same casings, bezels, spacer rings or transparent hoods.

Recommended amplifiers

MSR 010

(re. catalogue group K 11)

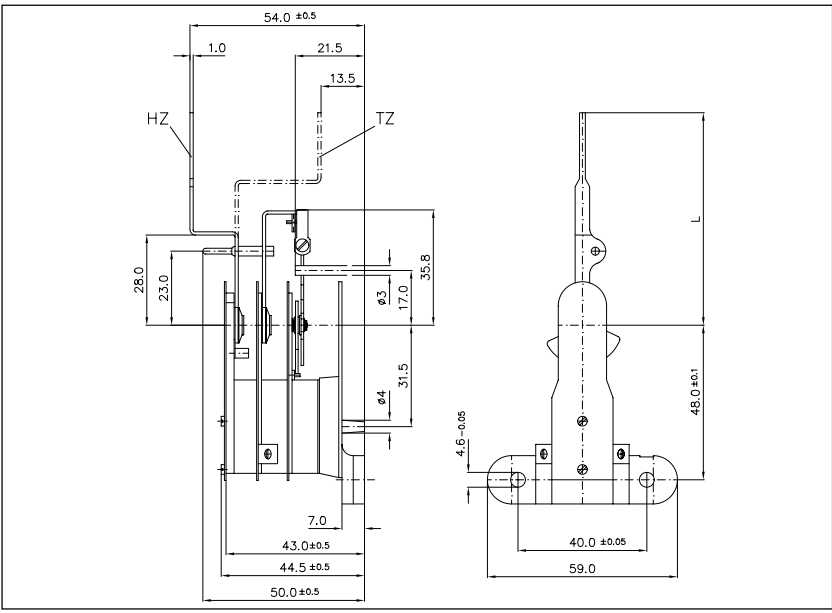

Required order information

Nominal size	DN 160, unit height
Type	re. type code
Set pointer	HZ (contact fitted below the dial) TZ (contact fitted on the dial)
Pointer length "L"	66 mm for DN 160 105 mm for DN 160-250
Connection	solder or screw terminal (brass nickel-plated) plug-in terminal (stainless steel)
Hair springs	normal light
Contact material	silver nickel, gold-plated silver palladium silver palladium, gold-plated gold silver platinum iridium
Contact base	plastic metal
Special executions available on request	

Additional information	Page
Description / technical data	
Low-action contacts _____	K 02-00.010
Snap-action contacts _____	K 02-00.020
Load table _____	K 14-10.010
Circuit diagrams / self-adhesive labels _____	K 14-10.020
Terminal configuration _____	K 14-10.032
Fitting, adjusting, dial mounting _____	K 14-10.040
Limit value switches immersed in oil _____	K 14-20.020
K-group	
Accessories _____	K 13

10.1994 Errors excepted. Subject to alteration without notice.