

**Limit value switches**  
**Pneumatic contacts**  
**single**

**DN**

**100**

**Type code**

**Type**

Pneumatic contact


**P-**

**Available switching functions**  
 pointer moving clockwise

**1**


**2**

Make-contact




**1**

Break-contact



**2**

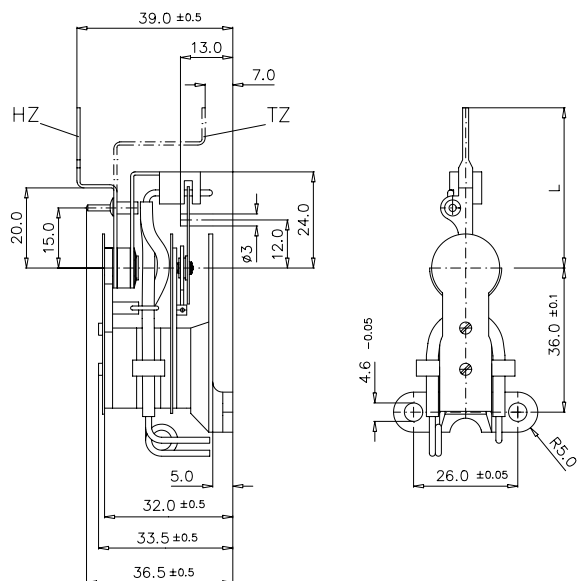

**Required order information**

|                                        |                                                                       |
|----------------------------------------|-----------------------------------------------------------------------|
| Nominal size                           | DN 100                                                                |
| Type                                   | re. type code                                                         |
| Set pointer                            | HZ (contact fitted below the dial)<br>TZ (contact fitted on the dial) |
| Pointer lenght "L"                     | 40 mm for DN 100<br>66 mm for DN 100-160                              |
| Connection                             | hose connection (brass tube Ø 1.5)                                    |
| Hair springs<br>(re. page K 14-20.011) | normal<br>light                                                       |
| Slot sensor<br>(re. page K 05-00.020)  | PN 100                                                                |
| Contact base<br>(re. page K 14-10.040) | base B - plastic (36 mm)<br>base A - plastic (25 mm)                  |

Special executions available on request

**Additional information**

**Page**

Description/technical data

|                                       |             |
|---------------------------------------|-------------|
| Pneumatic - contacts                  | K 05-00.010 |
| Circuit diagrams/self-adhesive labels | K 14-10.025 |
| Fitting, adjusting, dial mounting     | K 14-10.040 |

**K-group**

Accessories K 13

**Recommended amplifiers**

**Binary converter P/P**

(re. catalogue page K 05-00.030)