

Limit value switches in a modular system
oiltight, with integrated cable box
Electronic contact
single

DN

4½"

Type code

Type

Electronic contact

E-


Available switching functions
 pointer moving clockwise

1

2

Make-contact  **1**

Break-contact  **2**

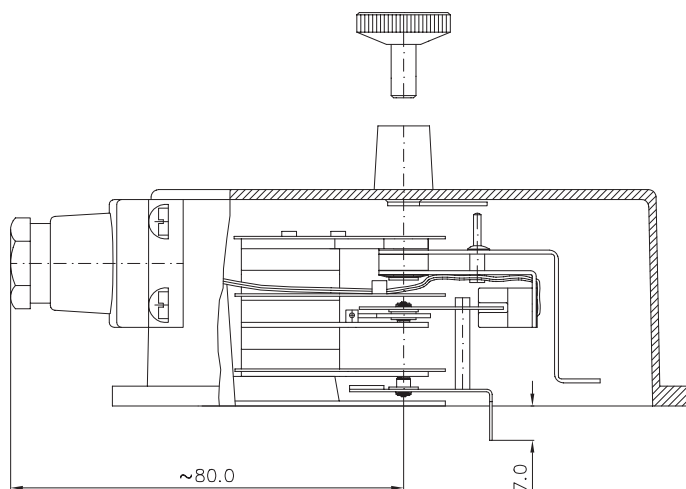

Dimensions re. page K 13-30.034

Required order information

Nominal size	DN 4½"						
Type	re. type code						
Set pointer	TZ (contact fixed in the hood)						
Execution	modular system oiltight with integrated cable box						
Connection	screw terminal (brass nickel-plated)						
Hair spring	normal						
(re. page K 14- 20.011)	light						
Slot sensor	Si 2-K08-AP6 (3-wire) (re. page K 04-00.030)						
	Si 2-K08-AG6 (2-wire) (re. page K 04-00.035)						
Hood diameter	Art. No.: (re. schedule)						
	<table><tr><td>Ø</td><td>Rim</td><td>Art. No.</td></tr><tr><td>118,5</td><td>4 mm</td><td>1000346</td></tr></table>	Ø	Rim	Art. No.	118,5	4 mm	1000346
Ø	Rim	Art. No.					
118,5	4 mm	1000346					

Special executions available on request

Additional information

Page

Description / technical data

General (modular system oiltight) _____	K 07-00.010
Electronic contacts _____	K 04-00.010
Terminal configuration _____	K 07-00.035
Fitting, adjusting _____	K 14-10.040
Limit value switches immersed in oil _____	K 14-20.020

K-group

Accessories _____ K 13